

Soft Wired Connector Leads

AT A GLANCE...

- Suitable for: Linking together of the soft wired circuit
- Lengths: From 250 to 10,000 mm
- Colours: Black & White

“Easy as ECD®”

- Used as an interconnecting lead between a power source and a soft wired power outlet.
- Male to female soft wiring connector leads (20 Amp) are available in lengths from 250mm to 10,000mm.
- Compatible with the ECD Soft Wiring System.
- Standard colours are Black & White.
- ECDCL1800TOL connects from a standard 10 Amp 3 pin socket to a soft wired circuit. It includes a thermal overload to prevent overloading of the 10 Amp circuit.
- Other ECDCL**** leads are interconnecting leads used to achieve a desired length.
- ECDALM0500 can be wired into an appliance, allowing it to be connected to the soft wired system.
- Test Plugs (ECDSWTP) are available for testing soft wired circuits.
- Products comply with AS/NZS61535:2011, AS/NZS60227.5:2002 – refer approval nos GMA-515332 & SAA090324EA.


ECDALM0500



ECDCL****



ECDCL1800TOL

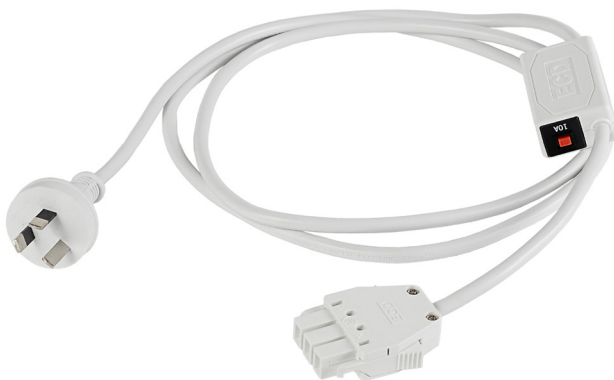

ESTABLISHED 1979

Electric Cable Duct Systems P/L

Phone: 1300 123 ECD (323)


Email: info@ecd.net.au

Fax: 1300 372 825

website: www.ecd.net.au

ABN 80005544105

ASSEMBLY DIAGRAM CONNECTOR LEADS

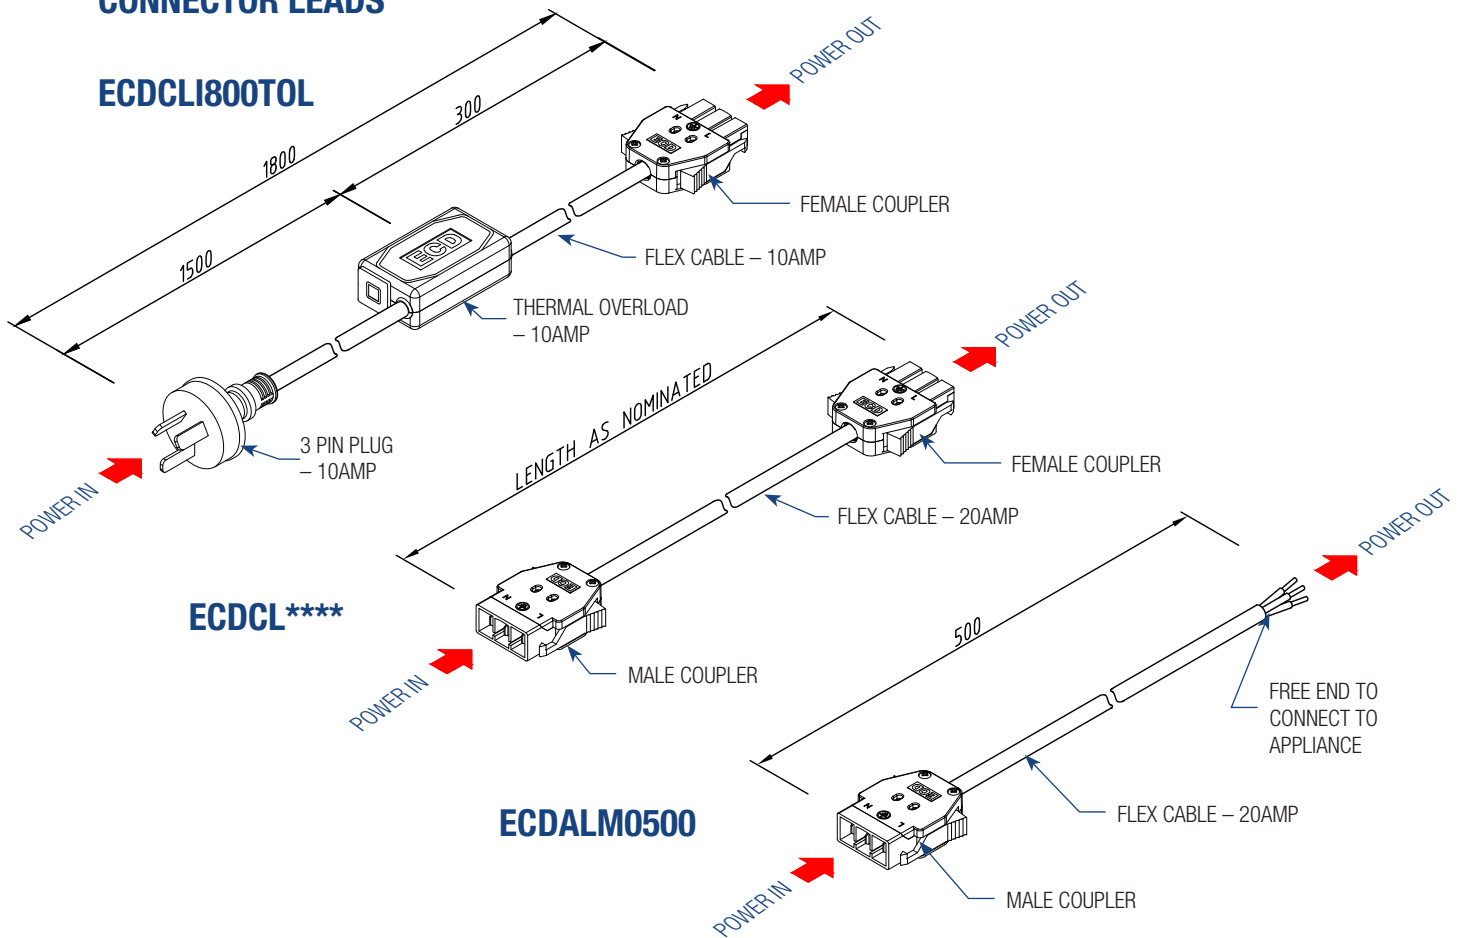

PARTS LIST

DESCRIPTION	PART NO.	COLOUR
Appliance Lead (500mm long) c/w – male coupler and free end	ECDALM0500	Nominate (see below)
Connector Lead (250mm long) 20 Amp	ECDCL0250	Nominate (see below)
Connector Lead (500mm long) 20 Amp	ECDCL0500	Nominate (see below)
Connector Lead (1000mm long) 20 Amp	ECDCL1000	Nominate (see below)
Connector Lead (1500mm long) 20 Amp	ECDCL1500	Nominate (see below)
Connector Lead (2000mm long) 20 Amp	ECDCL2000	Nominate (see below)
Connector Lead (2500mm long) 20 Amp	ECDCL2500	Nominate (see below)
Connector Lead (3000mm long) 20 Amp	ECDCL3000	Nominate (see below)
Connector Lead (3500mm long) 20 Amp	ECDCL3500	Nominate (see below)
Connector Lead (4000mm long) 20 Amp	ECDCL4000	Nominate (see below)
Connector Lead (4500mm long) 20 Amp	ECDCL4500	Nominate (see below)
Connector Lead (5000mm long) 20 Amp	ECDCL5000	Nominate (see below)
Connector Lead (6000mm long) 20 Amp	ECDCL6000	Nominate (see below)
Connector Lead (7000mm long) 20 Amp	ECDCL7000	Nominate (see below)
Connector Lead (8000mm long) 20 Amp	ECDCL8000	Nominate (see below)
Connector Lead (10000mm long) 20 Amp	ECDCL10000	Nominate (see below)
Connector Lead (1800mm long) c/w- 3 pin plug 10 Amp, soft wired coupler & thermal overload	ECDCL1800TOL	Nominate (see below)

Nominate Colour/Finish: BK=Black, WE=White

Note: All ECD soft wiring must be installed by a licenced electrical contractor as per AS/NZ300 Wiring Regulations